



EC157N

157 N型单晶电池片



正面电极



背面电极

产品特征

尺寸规格 157mmx157mm±0.5mm

电池厚度 140±20um

电池正面 主栅5根, 蓝色减反射膜

电池背面 主栅5根, 蓝色减反射膜



高转换效率, 正面效率≥25%



双面率≥80%



光致衰减为0



优越的抗PID性能



功率温度系数低至-0.30%/K



弱光效应好




封装损失更低, 更适合高效组件




档位 (Eff)	功率 (Pmpp)	最大功率电压 (Umpp)	最大功率电流 (Impp)	开路电压 (Uoc)	短路电流 (Isc)
19.2%	4.669	0.555	8.413	0.646	8.926
19.0%	4.617	0.554	8.334	0.644	8.866
18.8%	4.573	0.553	8.269	0.643	8.820
18.6%	4.522	0.553	8.192	0.642	8.736
18.4%	4.472	0.553	8.087	0.641	8.645
18.2%	4.421	0.553	7.995	0.640	8.508
18.0%	4.368	0.553	7.898	0.638	8.454
17.8%	4.320	0.552	7.826	0.637	8.359
17.6%	4.267	0.552	7.730	0.636	8.261
17.4%	4.216	0.552	7.637	0.635	8.147
17.0%	4.159	0.552	7.534	0.633	8.011

IV曲线

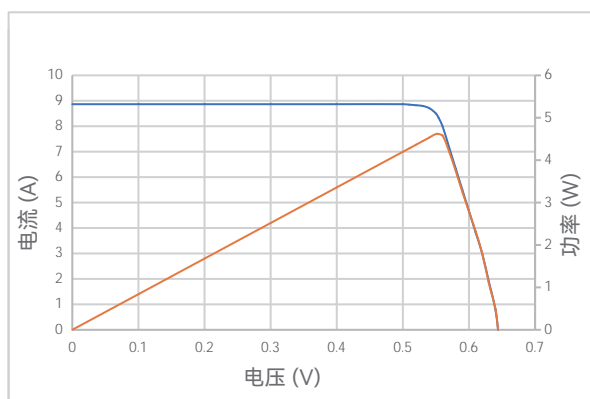

光谱响应

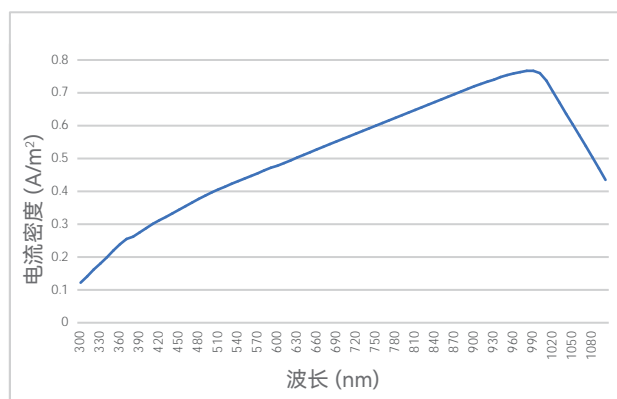

温度系数

电流温度系数	+0.06%/K
电压温度系数	-0.37%/K
功率温度系数	-0.36%/K

产品包装

每托30箱、每箱16包、每包120片